


# PLANT CONFIGURATION #4

FLY ASH BATCHING CAPACITY AND HIGHER DAILY PRODUCTION RATES WITH LOW-PROFILE PORTABLE AUXILLIARY SILOS AS "FAST-RECOVERY" CEMENT AND FLY ASH SILOS

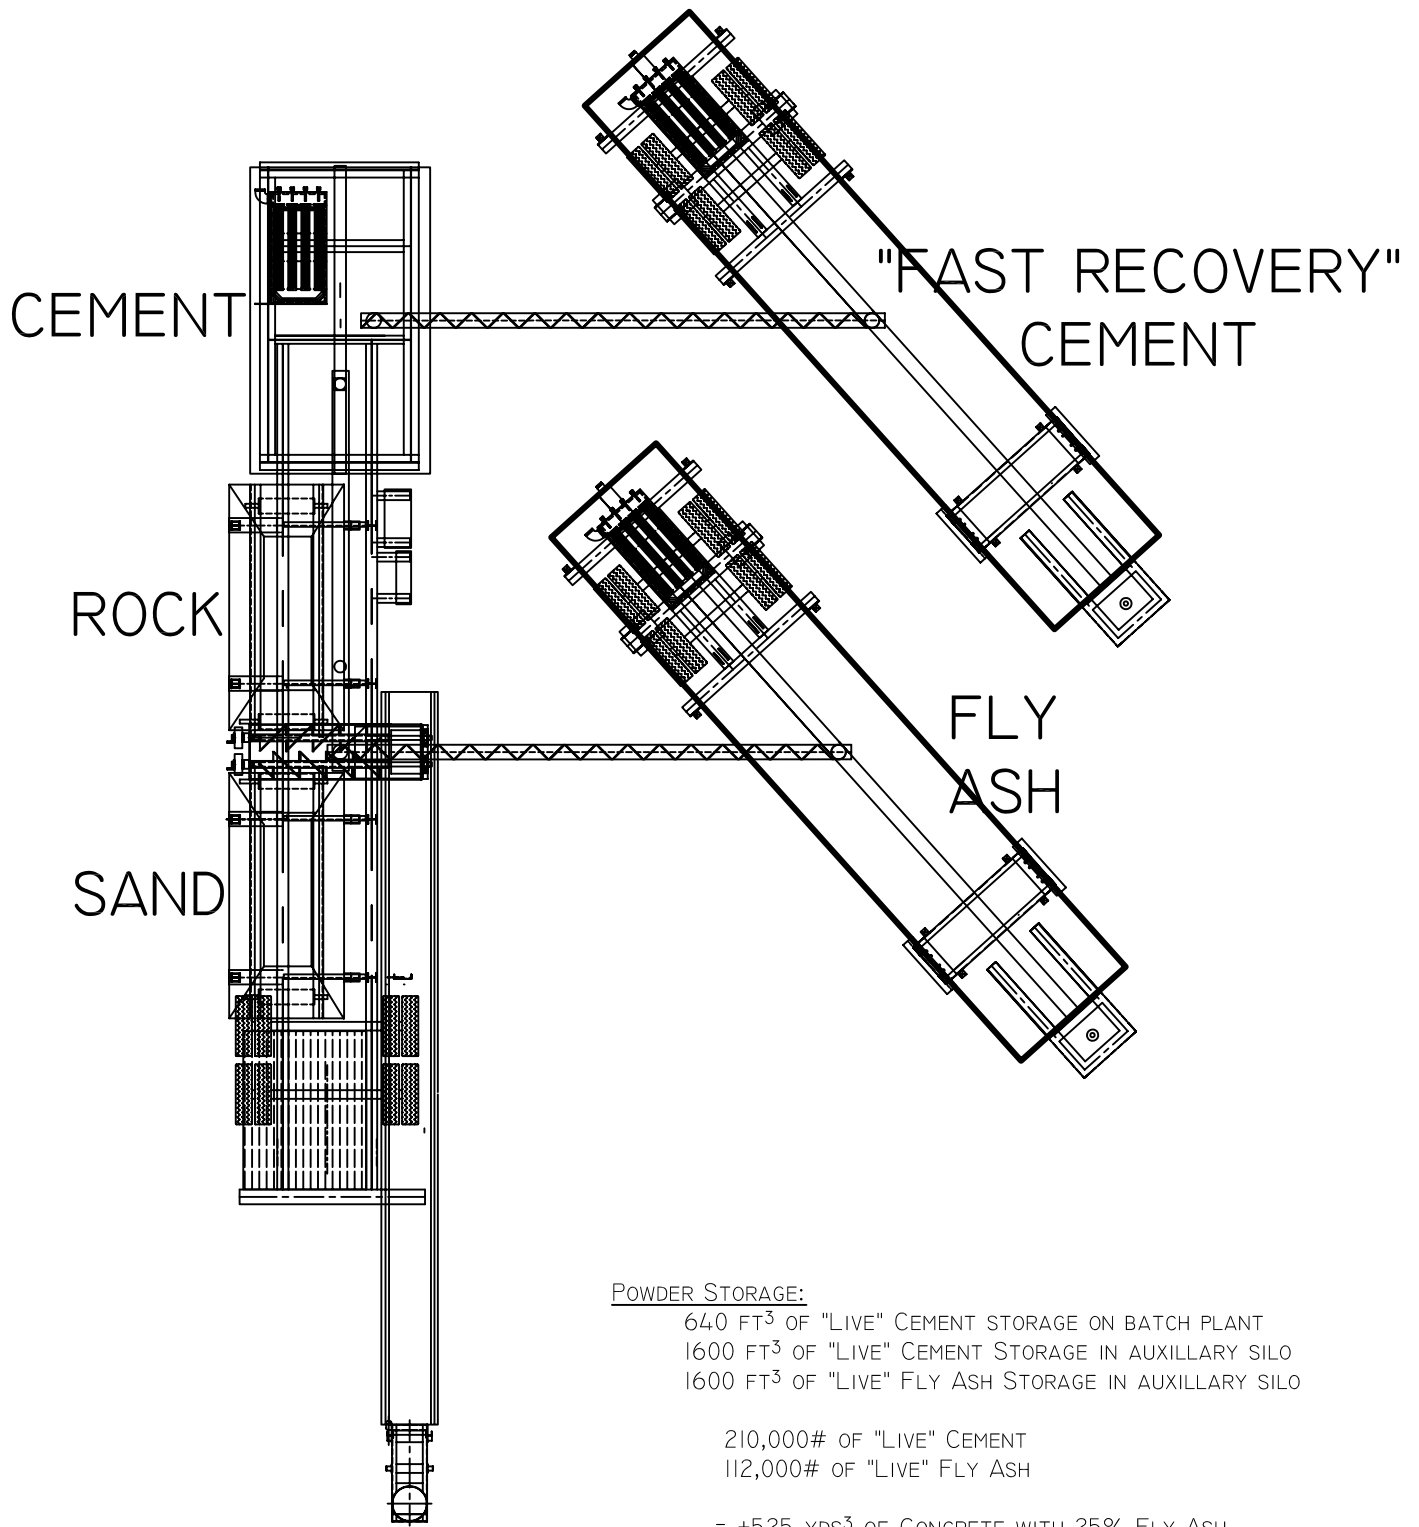

POWDER STORAGE:

640 FT<sup>3</sup> OF "LIVE" CEMENT STORAGE ON BATCH PLANT  
 1600 FT<sup>3</sup> OF "LIVE" CEMENT STORAGE IN AUXILLARY SILO  
 1600 FT<sup>3</sup> OF "LIVE" FLY ASH STORAGE IN AUXILLARY SILO

210,000# OF "LIVE" CEMENT  
 112,000# OF "LIVE" FLY ASH

= ±25 YDS<sup>3</sup> OF CONCRETE WITH 25% FLY ASH

RATINGS:

DELIVERY RATE:.....120YDS<sup>3</sup> PER HOUR  
 GENERAL USE DAILY PRODUCTION:.....±800YDS<sup>3</sup> PER DAY  
 INFREQUENT "LONG DAY" PRODUCTION:....±1200YDS<sup>3</sup> PER DAY

- INCLUDES PROVISIONS FOR 2 AGGREGATES
- HIGHEST POINT = 15'-0"